


MODEL 211
with diesel engine

Front soundproofing bottom section


- 1 Bolt
- 2 Rubber lip

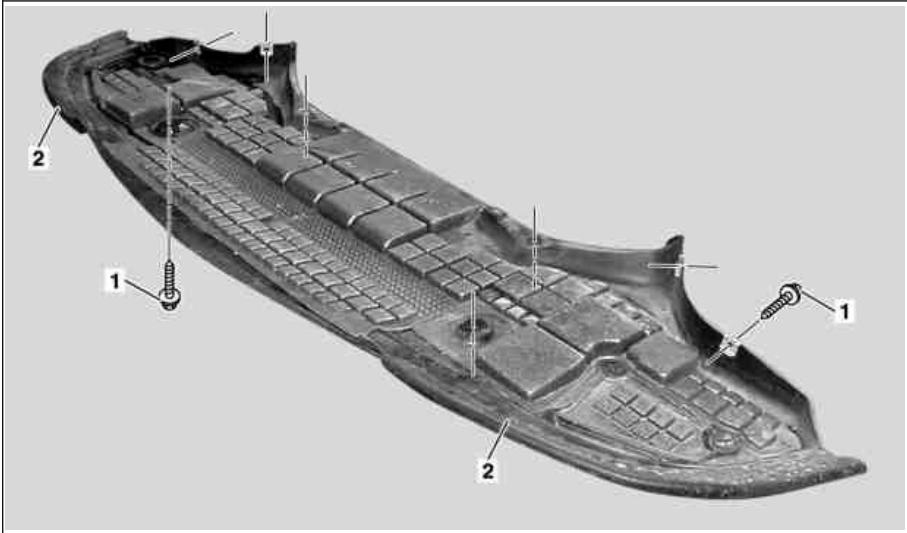

P94.30-2014-05

Center soundproofing bottom section


- 1 Bolt

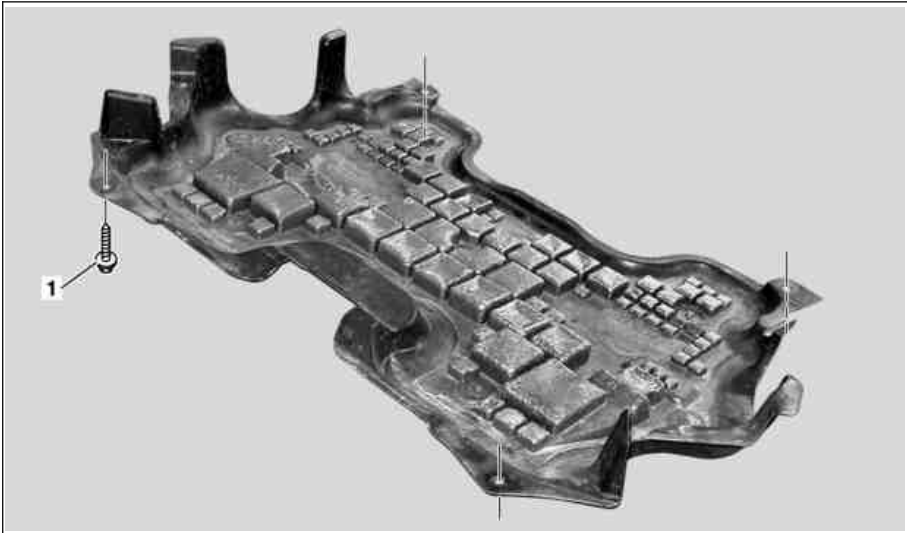

P94.30-2015-05

Rear soundproofing bottom section

- 1 Bolt

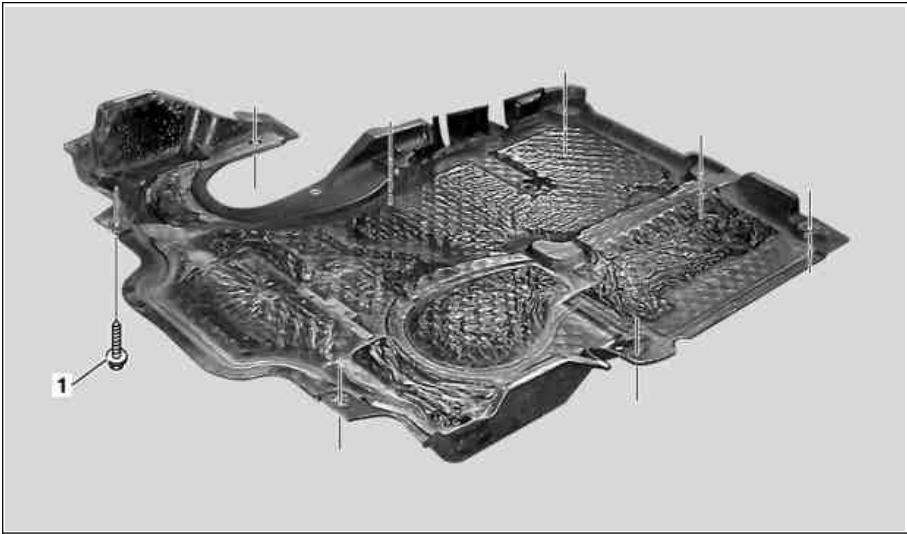

P94.30-2016-05

	Remove/install		
Danger!	Risk of death caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A

1	Raise vehicle with lifting platform		AR00.60-P-1000T
2	Unscrew bolts (1) and remove soundproofing bottom sections	<i>i</i> Observe removal sequence for soundproofing bottom sections: First remove center soundproofing bottom section. <i>i</i> Installation: Install front soundproofing bottom section so that rubber lips (2) are concealed by bumper.	
3	Install in the reverse order		